




MAZAKA
HEAVY INDUSTRY


SOLAR PILE DRIVER
MW600-TX5

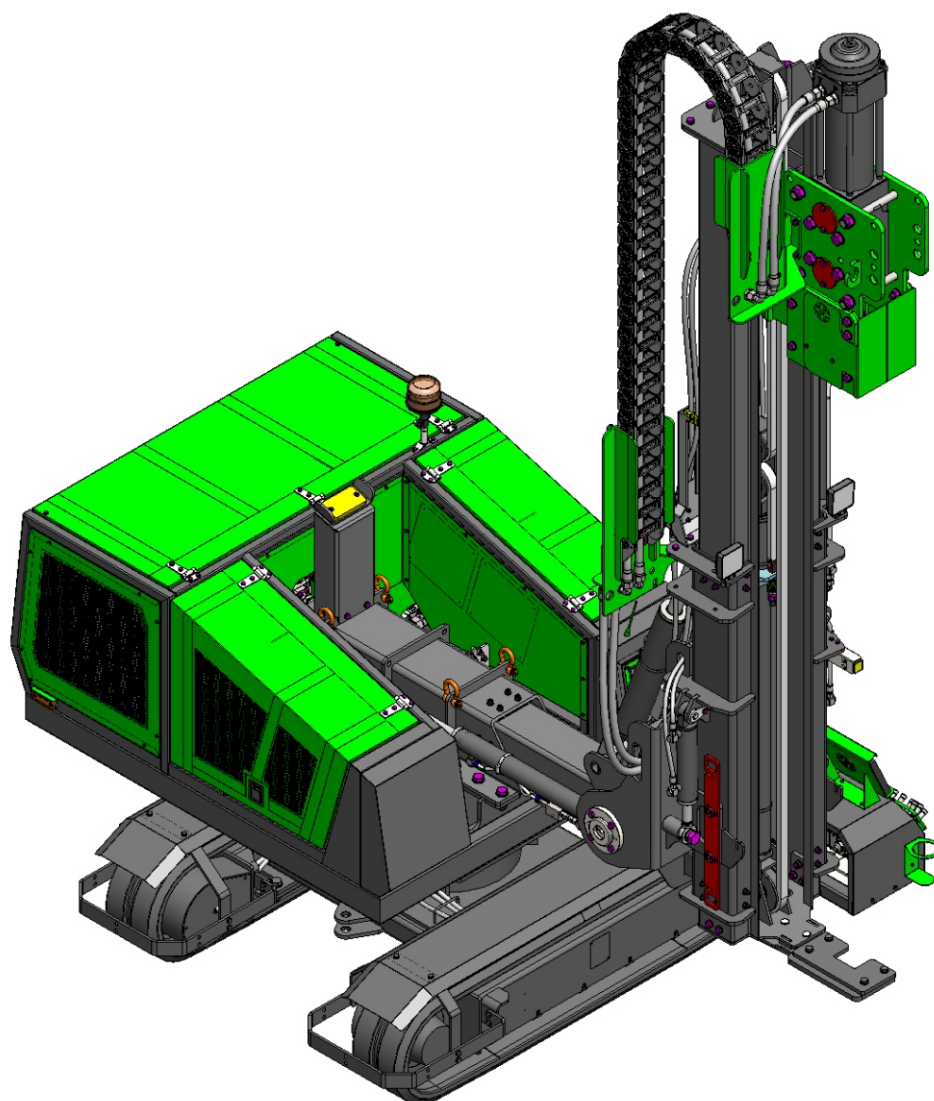



WE ARE AWARE...



MAZAKA
GROUP

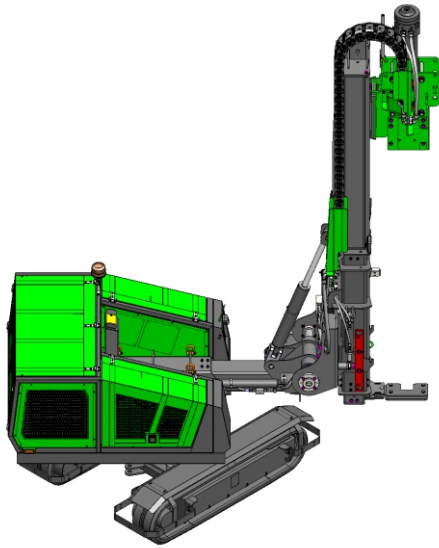

MW600-TX5

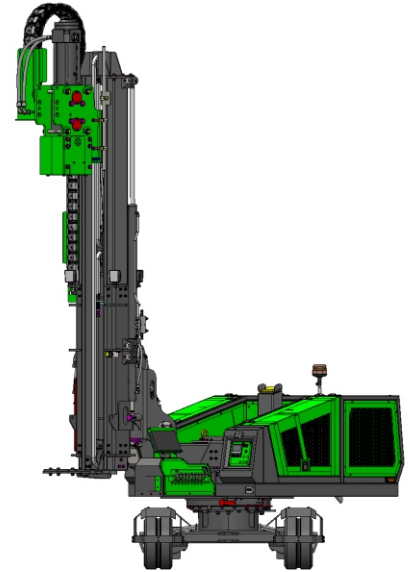

TECHNICAL SPECIFICATIONS

ENGINE

Make	YANMAR
Power	35.5 kW / Stage 5
Rated Speed	2200 rpm
Fuel Tank	60 l
DPF Filter	Yes

HAMMER

Power	1200 Joule
Operating Pressure	120 bar
Hammer Blow Rate	570-1180

HYDRAULIC SYSTEM







Oil Flow Rate	50-100 l
Oil Pressure	180 bar
Oil Tank	150 l

DIMENSION

Transport Width	A1	1700 mm
Transport Height	A2	2200 mm
Transport Length	A3	3850 mm
Width of Machine	A1	1980 mm
Height of Machine	A4	3200 mm
Length of Machine	A5	3150 mm
Mast Height	A6	3500 mm
Weight		4000 kg
Boom Stroke		480 mm
Rotation		90°
Tilt		15°
Angle of mast forward		20°
Angle of mast backward		-75°

TRAVEL

Low / High Speed	2.2 / 4 km/h
Gradeability 	20%
Sidewalk 	10°
Crawler Type	Rubber



Mazaka Factory

 Mimarşinan OSB Mah. 7. Cadde No:24
 Melikgazi/Kayseri/TÜRKİYE
 +90 352 311 44 18  +90 533 204 41 70
 info@mazaka.eu

Mazaka America LLC

 25 Old Kings Hwy N.Ste 13
 Darien, CT 06820
 +1 203 904 8074
 america@mazaka.eu

Mazaka Europe

 Industriestrasse 12-16, 42929
 Wermelskirchen Germany
 +49 2196 / 729 00 271
 europe@mazaka.eu